


relax

It's Rheem®




Floor Mounted water heaters

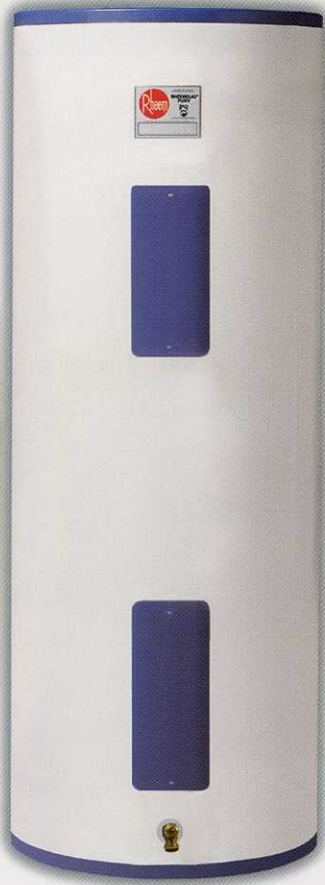

Fury Rheemglas® Electric Water Heater

- Temperature and pressure relief valve included
- Isolated tank design reduces conductive heat loss
- High efficiency resistored heating elements
- Anode rod equalizes aggressive water action
- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Foam insulated
- Single element and Thermostat
- Stainless steel heating elements
- Maximum working pressure of 150 PSI (10 BARS)
- Compliance: IEC 60335-2-21

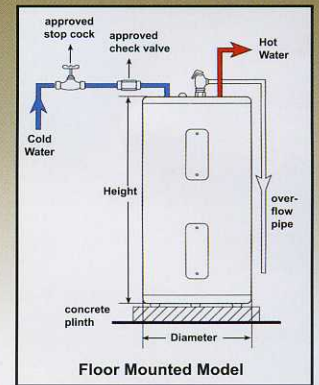

Model	Tank Capacity		Stainless Steel Element		Operating Weight (Kg)	Heater Dimension		Shipping Weight (Kg)	Shipping Dim. (Approx.)			Current Draw (amps)	Over Current Protection (amps)
	USG	Litres	Voltage Single Phase	(Kw)		Dia(mm)	Ht (mm)		L (mm)	B (mm)	Ht (mm)		
85V30-1	30	114	240	4.5	154	452	1165	40	470	470	1200	18.75	25
85V40-1	40	152	240	4.5	200	503	1200	48	520	520	1230	18.75	25
85V52-1	50	190	240	4.5	244	485	1455	54	500	500	1490	18.75	25
85V66-1	65	247	240	5.5	318	530	1500	71	560	560	1530	22.9	30
85V80-1	80	304	240	5.5	388	585	1500	84	605	605	1530	22.9	30
85V120-1	120	456	240	5.5	609	720	1590	153	850	850	1770	22.9	30

* Optional element available: 1.5kw, 3kw@240 volt. Water connections pipes for inlet and outlet – 3/4 inch. N.P.T.

DEPENDABLE • HIGH PERFORMANCE • ENERGY EFFICIENT

Although out of sight, the Rheem heater keeps on working, 24/7, year after year.

Call now, for a Rheem dealer nearest to you!

Rheem Manufacturing Company (Singapore) Pte Ltd

8 Pandan Crescent, UE Tech Park #02-02 Singapore 128464

Tel (Sales) : (65) 6872 1161

Tel (Service) : (65) 6872 2043

Fax : (65) 6872 1151

Email : rheem@rheemmfg.com.sg

Website : http://www.rheemmfg.com.sg



Authorised Dealer